


DECLARED DEPTH OF CHANNEL
 Outer Harbor Berths 1 to 8 14.2m
 Osborne, Penrice & Inner Harbor to Berth 11 9.3m
 Inner Harbor Berth 11 to Birkenhead Bridge 8.4m

UNDERKEEL CLEARANCE REQUIRED
 Outer Harbor 10% of Draft
 Inner Harbor 7.5% to 10% of Draft
 Alongside Berths 0.3m minimum



UNDER KEEL CLEARANCE

VESSEL _____ DATE _____

CHANNEL DEPTH _____

TIDE _____ + _____

TOTAL _____


MAXIMUM DRAFT - _____

UKC _____

REMARKS
 SILTING OCCURS IN THE PORT ADELAIDE RIVER VIDE SOUTH AUSTRALIAN NOTICE TO MARINERS NO. 7 of 2006

NOTES

1. CHART IS NOT SUITABLE FOR NAVIGATION PURPOSES.
2. COURSES ON THE CHART ARE AN INDICATION ONLY.
3. BRIDGE TEAM TO CONTINUOUSLY MONITOR THAT THE VESSEL IS PROCEEDING ACCORDING TO THE PLAN AND IMMEDIATELY BRING TO THE ATTENTION OF THE PILOT ANY MATTER WHICH CAUSES CONCERN.
4. CHART DATUM IS LAT - REFER TO AUS 137 & AUS138
5. OVERHEAD CLEARANCE HEIGHTS ARE IN HAT.

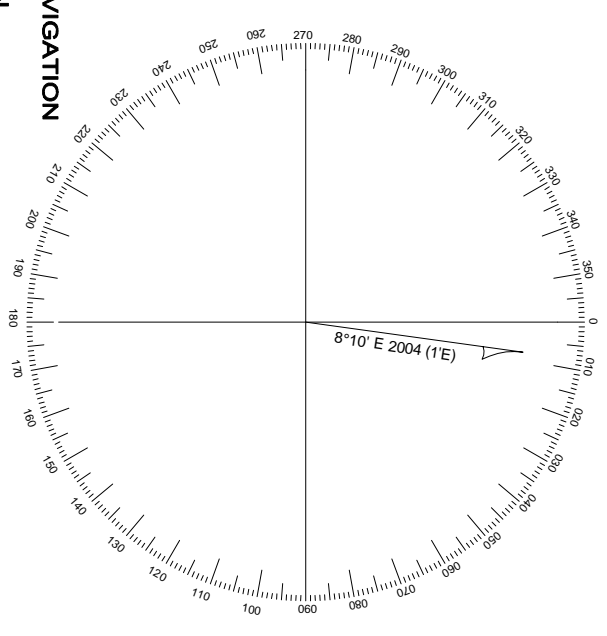

ALTERED	ADD	DESCRIPTION OF REVISION
DATE	30/6/10	PREXY BRIDGE LEAD ADDED TECH PORT & MARINA ADELAIDE ADDITIONAL GAS PIPELINES ADDED
CHECKED		

Flinders Ports
 SOUTH AUSTRALIA

PORT ADELAIDE
 PILOT PASSAGE PLAN

LOC 470 TYPE 13 SHEET 1 of 2

DRG. NO. **FP0130** REV J

SUPERSEDES DRG.

